



**NIPPON
PAINT**

WOOD MAGIC

TECHNICAL DATA SHEET

1K PU WOOD COATING

***One Solution
for Interior & Exterior***



**NO. 1 PAINT IN
ASIA PACIFIC***

International quality, hi-tech paints

☎ 1800 425 3636 ☎ 8939 65 3636

*Source: Top25 2023 Paint Manufacturers in Asia Pacific. Asia Pacific Coatings Journal, pp. 23

www.nipponpaint.co.in



NIPPON PAINT

WOOD MAGIC

PRODUCT DESCRIPTION

Nippon Paint Wood Magic 1K PU (interior & Exterior) is a highly-durable, one-pack transparent polyurethane-based paint that beautifies and protects wood, it also While it enhances the elegant and rich look of natural wood, it also protects furniture for longer periods.

GREEN ASSURED



PRODUCT FEATURES & BENEFITS



High PU Content



High Coverage



Fast Dry



UV & Scratch Resistance

International quality, hi-tech paints

1800 425 3636 8939 65 3636

*Source: Top25 2023 Paint Manufacturers in Asia Pacific. Asia Pacific Coatings Journal, pp. 23

www.nipponpaint.co.in



**NIPPON
PAINT**

WOOD MAGIC

TECHNICAL DETAILS

Bases & Colors	:	N.A.
Colour Range	:	Clear coat
Finish	:	Glossy, Silk Matt and Oak Yellow
Dry Time	:	To Touch: 60 minutes To Recoat: 4-5 Hours
Gloss Level	:	60° head: 92 - 94 units
Clean Up Solvent	:	Mineral Turpentine / General-purpose Thinner / NP Universal Thinner
Stability of Diluted Paint	:	24 Hours
Shelf Life	:	2 Years from the date of manufacture in original tightly closed containers.
Dilution	:	Up to 10% by volume Mineral Turpentine / General-purpose Thinner / NP Universal Thinner

Coverage

10 - 12
m² / litre / coat

(Actual coverage is dependant on the type of wood and surface preparation)



HOW TO APPLY

Surface Preparation




- Keep surface clean and dry.
- Remove dust, dirt, grease and any other contaminants from previously painted surfaces.
- Scrape off loose and flaking paint film.
- Smoothen the surface to be painted using Emery paper 180 and wipe it clean.

Application

Brush:	Direct application
Roller:	N.A.
Conventional Spray:	Dilute paint up to 10% by volume using Mineral Turpentine / General-purpose Thinner / NP Universal Thinner

Process

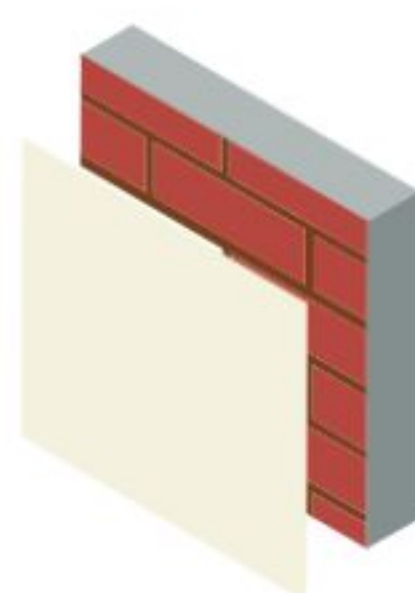

Wood coatings

Nippon Paint
Wood Magic



Apply 2-3 coat



Allow it to dry
for 6 hours

International quality, hi-tech paints

1800 425 3636 8939 65 3636



NIPPON PAINT

WOOD MAGIC

SAFETY HEALTH & ENVIRONMENTAL INFORMATION

During Painting:

- Always work in a well ventilated area.
- Wear appropriate attire, especially gloves and eye protection gear.
- Avoid contact with skin as it may cause irritation.

Cleaning:

Wash all the tools with Mineral Turpentine or General Purpose Thinner.

Safety Instructions:

- In the case of eye contact, rinse immediately with water and seek immediate medical treatment.
- To remove paint from skin, use soap and water or appropriate cleanser.
- In the event of spillage, contain and collect spilt paint by using sand or earth.

Precautions:

- Avoid painting when the temperature is below 10 degrees Celsius.
- Painting is not recommended if the moisture content is high.

Storage:

- Store paint in a cool, dry and well ventilated place away from heat sources, flammables or direct sunlight.
- Keep container tightly closed in a secure, upright position.
- Do not store near food, drink or animal feed.
- Keep out of reach of children.
- Do not dispose of unwanted paint into drains, water sources or open sewers.
- To dispose safely, pour unwanted paint onto old newspapers and let dry before placing in a proper waste receptacle.

Disposal Information:

Disposal of any paint waste & containers in accordance with applicable Environment (Protection) Act 1986 under the Hazardous Wastes (Management & Handling) rules 1989.

Environment:

- Does not contain any added lead, mercury or chromium compounds.
- Lead content does not exceed 90 parts per million.



Contact Us

Registered Office : NIPPON PAINT (INDIA) PRIVATE LIMITED

Plot No. K-8(I), Phase-II, SIPCOT Industrial Park, Mambakkam Village,
Sriperumbudur, Sunguvarchatiram, Kancheepuram - 602 106, Tamil Nadu, India.

International quality, hi-tech paints

☎ 1800 425 3636 ☎ 8939 65 3636